



FEATURES & BENEFITS

- Provides dry pressurized air to ensure signal quality of antenna waveguide and dielectric coaxial cable
- Highly configurable to meet the needs of wide ranging applications
- Field programmable operating pressure range from 0.10 psig to 7.50 psig (7mbar to 517mbar)
- Brushless dual-diaphragm compressor for long life
- Future-proof software based features allow updates and upgrades while in service
- Remote monitoring and control by Internet
- Configurable Master/Slave operations
- Ethernet, RS-422/485, RS-232 and alarm relay outputs for compatibility with nearly any system
- Display allows for IP configuration and status monitoring with or without network connection.
- Simple power connections for 100-240 VAC or $\pm 20-75$ VDC
- Small, light weight chassis with multiple mounting options makes installation easy
- Low energy use minimizes lifetime operational costs
- Quiet operation

DESCRIPTION

The ADH NETCOM automatic dehydrator supplies low pressure dry air to keep waveguide and coaxial cable dry. Output pressure is field configurable between 0.10 psig and 7.50 psig (7mbar - 517mbar) in 0.01 psig (0.67mbar) increments. Factory default pressure is 0.5 psig (34.5mbar). Operational monitoring and alarms are software based making them highly configurable in the field. Future software features can be installed while in service over the internet or local Ethernet network.

The ADH NETCOM automatic dehydrator is Ethernet network ready. Units can be configured and monitored using either built-in SNMP support or the web interface. Legacy system support is provided via RS-422/485 or RS-232

interfaces. Three programmable alarm relays are also included. User display shows output pressure, duty cycle, temperature, compressor hours and air drying canister status.

The ADH NETCOM automatic dehydrator uses a brushless dual-diaphragm pump for long life. Dehydrator operates with exceptionally low noise and vibration levels. The air drying canisters use aluminum oxide desiccant for high efficiency. The humidity sensor signals for regeneration based upon current dew point rather than at fixed time intervals for additional energy savings and long desiccant life.

The ADH NETCOM automatic dehydrator requires only 5-1/4" (3-U) of rack space and is just 12.25" (304.8mm) deep. Mounting hardware allows for flexible installation options including dual- and

single-post rack mounting and wall mounting. The standard unit weighs just 16 lbs (7.26 kg).

The ADH NETCOM automatic dehydrator operates from 100-240 VAC, 50/60 Hz. Optional units are also available at $\pm 20-75$ VDC. The dehydrator consumes a maximum of 150 watts during regeneration and about 40 watts otherwise. Heat dissipated is up to 512 BTU/hr during regeneration and about 136 BTU/hr otherwise. The ADH NETCOM creates an exceptionally low heat load for an automatic dehydrator.

A panel with display allows for IP configuration and status monitoring with or without network connection.

For complete information describing application, installation and features, please contact ETI Customer Service or visit www.networketi.com.

SPECIFICATIONS

GENERAL

Area of use

Non-hazardous locations

Approvals

 **Type 1950**
Information Technology Equipment
Also evaluated by Underwriters Laboratories Inc.[®]
In accordance with IEC Publication 60950

Regeneration Method

Automatic, demand

Maximum dew point

-40° F/C

ENCLOSURE

Dimensions

17" × 12.25" × 5-1/4" (432mm × 311.15mm ×

Weight

133mm) 16 lbs (7.26 kg)

Mounting

Dual-post rack, flush mounted

Single-post rack, center mounted

Wall mounted

POWER

Supply voltage

100-240 VAC, 50/60 Hz | ±20-75 VDC

Maximum current

1.0 Amps at 100 V

Power usage

40 W typical, 150 W max

Heat dissipation

136 BTU/hr typical @40 W, 512 BTU/hr max @150 W

CONTROL

Protocols

HTTP (Web Interface), SNMP, UDP, TFTP, TCP

Maximum pressure

Configurable Range: 0.20 psig - 7.5 psig (14mbar - 517mbar), Default: 0.50 psig (34.5mbar)

Minimum pressure

Configurable Range: 0.10 psig - 7.4 psig (7mbar - 510mbar), Default: 0.30 psig (21mbar)

Low pressure alarm level

User Configurable, Default: 0.15 psig (10mbar)

High pressure alarm level

User Configurable, Default: 1.5 psig (103.5mbar)

Alarm relays

Contact Type - Form C, SPDT, reverse acting

Ratings - 0.25 Amps @ 60 V

User Configurable, Defaults - Alarm Relay 1:

Summary Alarm, Alarm Relay 2: Low Pressure

Alarm, Alarm Relay 3: Over Pressure Alarm

Duty cycle alarm

User Configurable, Default: 50%

Master/Slave configuration

User Configurable, Default: Standard/Slave

ENVIRONMENTAL

Operating temperature

32°F to 131°F +/-2°F (0°C to 55°C +/-1°C)

Storage temperature

-40°F to 140°F (-40°C to 60°C)

OUTPUT

Flow rate

25.4 scfh (12 lpm)

Maximum pressure

7.5 psig (517mbar)

Internal safety relief valve

8 psig (552mbar)

Display units

SI (millibars); English (psig), default

Discharge port

1/8" NPT

3/8" or 1/4" hose barb (both included)

ORDERING INFORMATION

ORDER NUMBER

25526

DESCRIPTION

ADH NETCOM, AC

25527

ADH NETCOM, DC

25523

ADH NETCOM, NEMA

25524

ADH NETCOM, NEMA, MIL-SPEC, TYPE 1

25525

ADH NETCOM, NEMA, MIL-SPEC, TYPE 2

LIMITED WARRANTY

ETI's two year limited warranty covering defects in workmanship and materials applies. Contact Customer Service for complete warranty information.


DISCLAIMER

ETI makes no representations or warranties, either expressed or implied, with respect to the contents of this publication or the products that it describes, and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. ETI reserves the right to revise this publication, and to make changes and improvements to the products described in this publication, without the obligation of ETI to notify any person or organization of such revisions, changes or improvements.

The ETI logo, We Manage Heat, and ADH are registered trademarks of ETI. NETCOM is a trademark ETI. Copyright © 2012 ETI. All rights reserved.

NETCOM MODEL ADH MOUNTING OPTIONS

Rack Mount

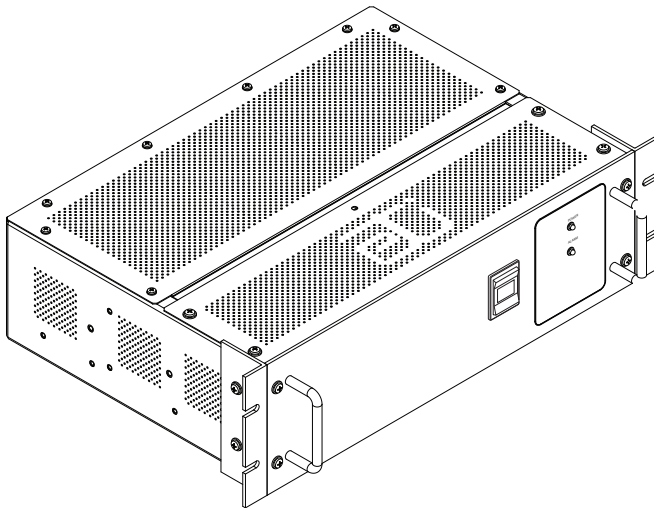

Wall Mount

